Y STRAINER
DUCTILE IRON
PN25
CODE . LV 1002

LAVA
FLOW SOLUTIONS

SPECIFICATION: **Ductile Iron Y Strainer,Bolted Cap, Stainless Steel Wire Mesh 304 Accordance with PN25 rated. BS EN 10226-2,Suitable for mounting in horizontal and vertical**

Pressure Rating : PN25
END CONNECTION: ***Flanged Accordance to BS 4594 - BS EN 1092-2***
Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	*25 bar*
Testing Pressure Shell:	*37 bar*
Suitable Media:	*Water, Oil , Steam*

Temperature Ratings :

Temperature (C) :	-10 ˚C	to	120 ˚C


LIST OF MATERIALS

Part	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Plug	Ductile Iron
Screen	Stainless steel



Dimensions

DN mm	SIZE inch	L	H
65	2- 1/2	290	180
80	3	310	215
100	4	350	235
125	5	400	275
150	6	480	305
200	8	600	390
250	10	730	540
300	12	850	680
350	14	980	740
400	16	1100	845

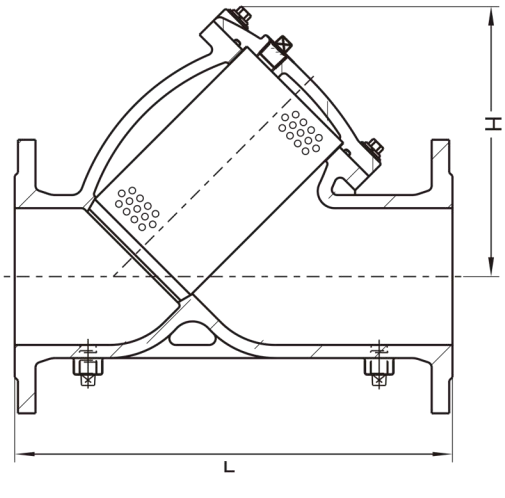

All size is nominal(indicative)
Actual dimesions may vary