BASKET STRAINER

DUCTILE IRON

PN25

CODE . LV 1004

LAVA FLOW SOLUTIONS

SPECIFICATION : **Ductile Iron Basket Strainer, Bolted Cab, Stainless Steel Wire Mesh 304 Accordance with PN25 rated. BS EN 10226 - 2 , suitable for mounting in horizontal and vertical**

Pressure Rating : PN25

END CONNECTION: ***Flanged Accordance to BS 4594 - BS EN 1092-2***

Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	*25 bar*
Testing Pressure Shell:	*37 bar*
Suitable Media:	*Water, Oil , Steam*

Temperature Ratings :

Temperature (C) :	-10 ˚C	to	120 ˚C


LIST OF MATERIALS

Part	Material
Body	Ductile Iron
Bonnet	Ductile Iron
Plug	Ductile Iron
Screen	Stainless steel



Dimensions

DN mm	SIZE inch	L	H1	H2
65	2- 1/2	210	155	95
80	3	251	190	105
100	4	292	205	117
125	5	334	219	146
150	6	378	235	165
200	8	472	295	215
250	10	511	335	325
300	12	680	405	355
350	14	769	585	345
400	16	842	590	390
450	18	842	590	420
500	20	842	600	510
600	24	1045	1175	515

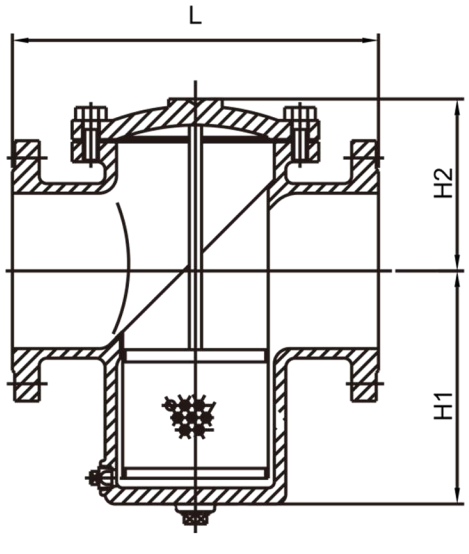

Actual dimesions may vary