PRESSURE INDEPENDENT CONTROL VALVE PICV (DIAPHRAGM) PN25

CODE . LV 1902


LAVA FLOW SOLUTIONS

SPECIFICATION: **Brass Body Pressure Independent Control Valve with EPDM Diaphragm and O- Ring, PPS Cone Internal Metal Components (Stainless Steel) Brass Test Points, Threaded Ends Connection Thread**



Specification

- Forged Brass body
- Pressure Rating: PN25
- Medium Temperature -20 to 120°C
- EPDM O-Ring
- EPDM Diaphragm
- PPS Cone
- Stainless Steel metal components (internal)
- Female threaded ends connection to ISO
- Brass test points
- Available with On/Off or Modulating Actuator
- Actuator details:
- On/Off option with Thermal Actuator
- Modulating Option with Motoric or Thermal Actuator

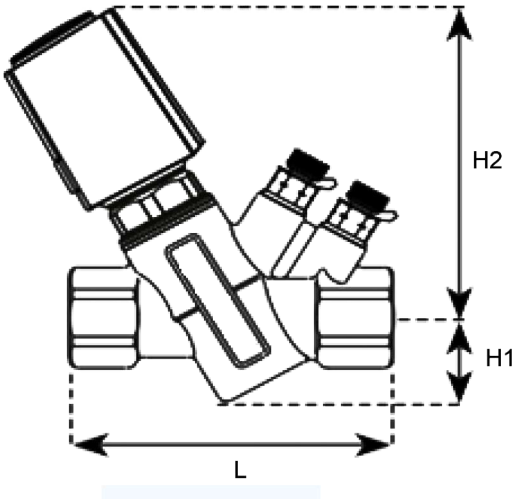

Dimensions

DN	H1 (mm)	H2 (Thermal) (mm)	H2 (Motoric) (mm)	L (mm)	Insert Size (mm)	Flow Rate Range (L/h)
15	31	116	124	81	20	Up to 1110
20	31	116	124	85	20	Up to 1110
25	31	116	124	102	20	Up to 2650

All size is nominal(indicative)
Actual dimesions may vary