BALL VALVE(EXTENDED)
BRONZE
PN25
CODE . LV 302

LAVA
FLOW SOLUTION

SPECIFICATION: ***Bronze Ball Valve,*** **Accordance with BS 1982 EN / 10226/2 PN25 rated. Body Bronze CC491K,Ball Brass CW 617N(CP), Stem DZR Brass CW602N,Lever Mild Steel(CP), PVC Lever Cover**

Pressure Rating : PN25

END CONNECTION: ***Taper Threaded According BS EN 10226-2 (ISO 7-1)/BS 21"***


Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	***25 bar***
Testing Pressure Shell :	***41 bar***
Suitable Media:	***Water , Oil , Steam***

Temperature Ratings :

Temperature :	***-10˚C***	***to***	***180˚C***

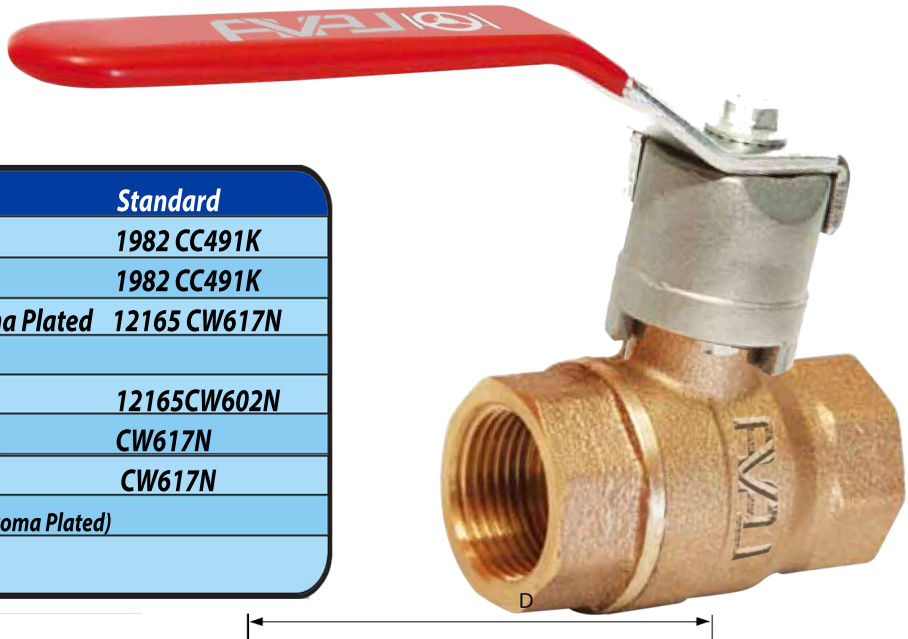


LIST OF MATERIALS

Part	Material	Standard
Body	Bronze	1982 CC491K
Cap	Bronze	1982 CC491K
Ball	Brass + Chroma Plated	12165 CW617N
Seat	PTFE	
Stem	DZR Brass	12165CW602N
Extension Stem	Brass	CW617N
Extension Housing	Brass	CW617N
Handle	Mild Steel (Chroma Plated)	
Handle Caver	PVC	

Dimensions

DN mm	DN inch	L	H	D
15	1/2	53	44	95
20	3/4	61	51	110
25	1	71	55	110
32	1-1/4	85	65	140
40	1-1/2	92	70	140
50	2	114	83	160

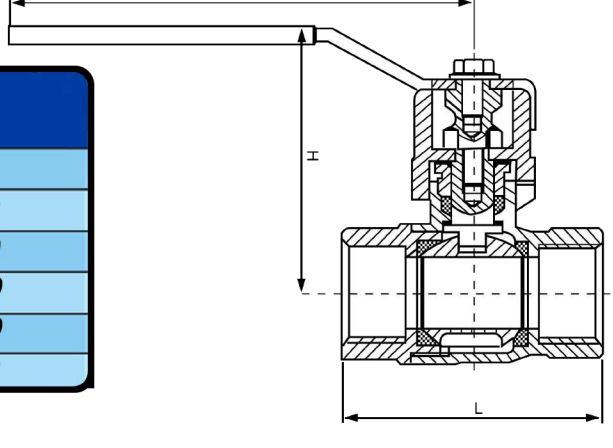

All size is nominal(indicative)
Actual dimesions may vary