GLOBE VALVE
BRASS
PN25
CODE . LV 402

LAVA
FLOW SOLUTION

SPECIFICATION: *Brass Globe Valve,* **Accordance with BS 1982 EN / 10226/2**
PN25 rated. Body, Bonnet and disc to Brass to BS EN 1982, CC491K

Pressure Rating : ***PN25***
END CONNECTION: *Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"*
Medium : ***Water,Oil,Steam***

Pressure Rating :

Working Pressure :	*25 bar*
Testing Pressure Shell:	*41 bar*
Suitable Media :	*Water , Oil , Gas*

Temperature Ratings :

Temperature (C) :	*-10*	*to*	*180 ˚C*


LIST OF MATERIALS

Part	Material
Body	Brass
Bonnet	Brass
Disc	Brass
Stem	Brass Rod
Packing	PTFE
Gland	Brass Rod
Hand Wheel	Aluminum



Dimensions

DN		L	H	D
mm	inch			
15	1/2	52	70	60
20	3/4	63	82	65
25	1	76	92	70
32	1-1/4	84	108	78
40	1-1/2	98	120	92
50	2	116	140	103

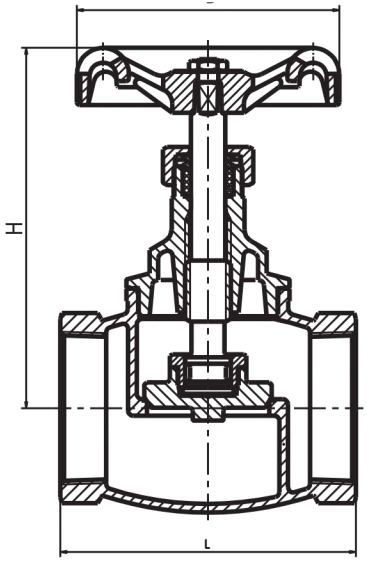

All size is nominal(indicative)
Actual dimesions may vary