TRIPLE DUTY VALVE

DUCTILE IRON
PN16
CODE . LV 605

LAVA
FLOW SOLUTION

SPECIFICATION: ***Ductil Iron, Triple Duty Valve,*** **Accordance with BS 7350 PN16 Rated. EPDM Disc, Bolted Bonnet, Integral Square Edged Entrance Orifice Plate & Insertion DZR Test Points Fitted**

Pressure Rating : PN16
END CONNECTION: ***Taper threaded According BS EN 1092-2 (ISO 7-1)/BS 21"***
Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	***15 bar***
Testing Pressure Shell :	***24 bar***
Suitable Media:	***Water , Oil , Steam***

Temperature Ratings :

Temperature :	***-10˚C***	***to***	***120˚C***




LIST OF MATERIALS

Part	Material	Standard
Body	Ductile	EN-JI 1050
Bonnet	Ductile	EN-JI 1050
Disc	EPDM	EN-JI 1050
Stem	Stainless steel	BS 970
Packing	Graphite	Non - Asbestos
Spring	Stainless steel	BS 970
Hand Wheel	Ductile	EN-JI 1050

Dimensions

DN mm	DN inch	L	H	D
65	2-1/2	290	265	200
80	3	310	270	200
100	4	350	310	240
125	5	400	340	290
150	6	480	340	290
200	8	600	537	350
250	10	730	570	420
300	12	850	690	420

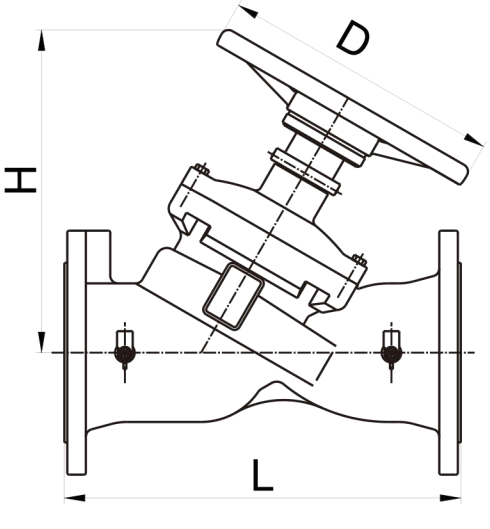

All size is nominal(indicative)
Actual dimesions may vary