TRIPLE DUTY VALVE

DUCTILE IRON
PN25
CODE . LV 606

LAVA
FLOW SOLUTION

SPECIFICATION: *Ductil Iron, Triple Duty Valve,* Accordance with BS 7350 PN16 Rated. EPDM Disc, Bolted Bonnet, Integral Square Edged Entrance Orifice Plate & Insertion DZR Test Points Fitted

Pressure Rating : ***PN25***
END CONNECTION: *Taper threaded According BS EN 1092-2 (ISO 7-1)/BS 21"*
Medium : ***Water,Oil,Steam***

Pressure Rating :

Working Pressure:	*25 bar*
Testing Pressure Shell :	*37.7 bar*
Suitable Media:	*Water , Oil , Steam*


Temperature Ratings :

Temperature :	*-10 ˚C*	*to*	*120 ˚C*



LIST OF MATERIALS

Part	Material	Standard
Body	Ductile	EN-JI 1050
Bonnet	Ductile	EN-JI 1050
Disc	EPDM	EN-JI 1050
Stem	Stainless steel	BS 970
Packing	Graphite	Non - Asbestos
Spring	Stainless steel	BS 970
Hand Wheel	Ductile	EN-JI 1050

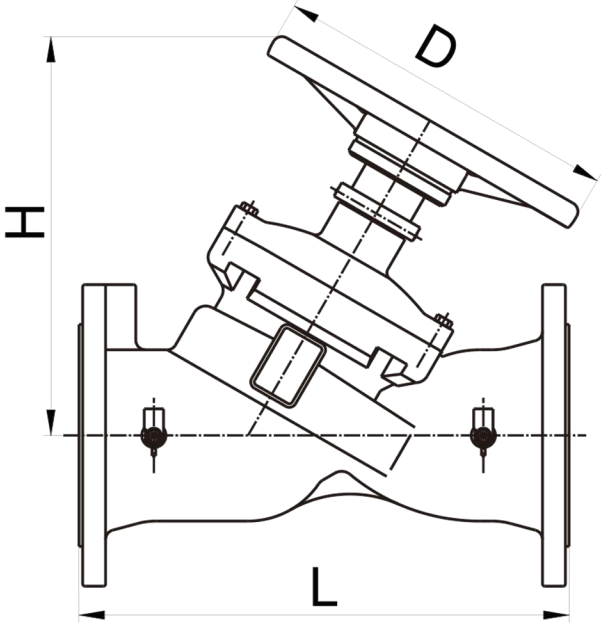

Dimensions

DN mm	DN inch	L	H	D
65	2-1/2	290	265	200
80	3	310	270	200
100	4	350	310	240
125	5	400	340	290
150	6	480	340	290
200	8	600	537	350
250	10	730	570	420
300	12	850	690	420

All size is nominal(indicative)
Actual dimesions may vary