CHECK VALVE
BRASS
PN20
CODE . LV 702

LAVA
FLOW SOLUTIONS

SPECIFICATION: Brass Check Valve,Screwed Cap, Accordance with BS 5154 EN / 12288:2010, PN20 rated. BS EN 10226-2 suitable for mounting in horizontal and vertical

Pressure Rating : PN20
END CONNECTION: *Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"*
Medium : Water,Oil,Steam

Pressure Rating :


Working Pressure:	*20 bar*
Testing Pressure Shell:	*31 bar*
Testing Pressure Seat:	*22 bar*
Suitable Media:	*Water, Oil , Steam*

Temperature (C) :	*-10 to 180 ℃*



LIST OF MATERIALS

Part Name	*Material*	*Standard*
Body	*Brass*	*12165 CW617N*
Cap	*Brass*	*12165 CW617N*
Disk	*Brass*	*12165 CW617N*
Hinge Pin	*DZR Brass - Steel*	
Gasket	*Non - Asbestos*	

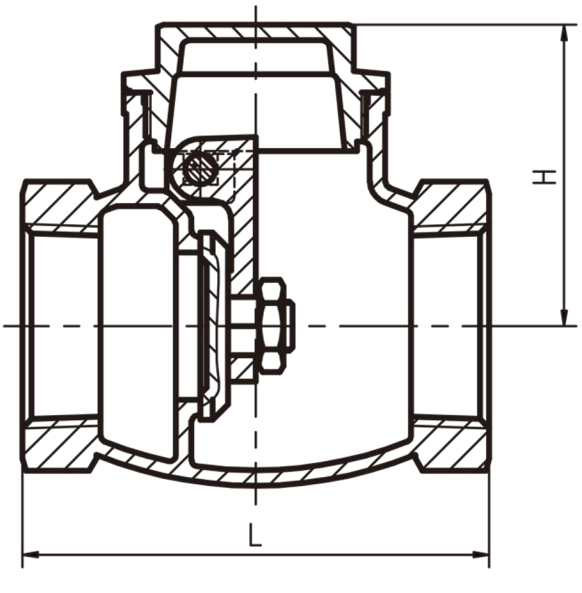

Dimensions

DN mm	*SIZE inch*	*L*	*H*
15	1/2	58	37
20	3/4	66	43
25	1	76	49
32	1 1/4	88	57.5
40	1 1/2	96	63
50	2	112	72

All size is nominal(indicative)
Actual dimesions may vary