Y STRAINER
CAST IRON
PN16
CODE . LV 1001

LAVA
FLOW SOLUTIONS

SPECIFICATION: **Cast Iron Y Strainer,Bolted Cap, Stainless Steel Wire Mesh 304**
Accordance with PN16 rated. BS EN 10226-2, Suitable for mounting in horizontal and vertical

Pressure Rating : PN16
END CONNECTION: ***Flanged Accordance to BS 4594 - BS EN 1092-2***
Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	*16 bar*
Testing Pressure Shell:	*24 bar*
Suitable Media:	*Water, Oil , Steam*

Temperature Ratings :

Temperature (C) :	-10 ˚C	to	120 ˚C


LIST OF MATERIALS

Part	Material
Body	Cast Iron
Bonnet	Cast Iron
Plug	Cast Iron
Screen	Stainless steel



Dimensions

DN mm	SIZE inch	L	H
65	2- 1/2	290	180
80	3	310	215
100	4	350	235
125	5	400	275
150	6	480	305
200	8	600	390
250	10	730	540
300	12	850	680
350	14	980	740
400	16	1100	845
450	18	1200	838
500	20	1250	908
600	24	1450	1078

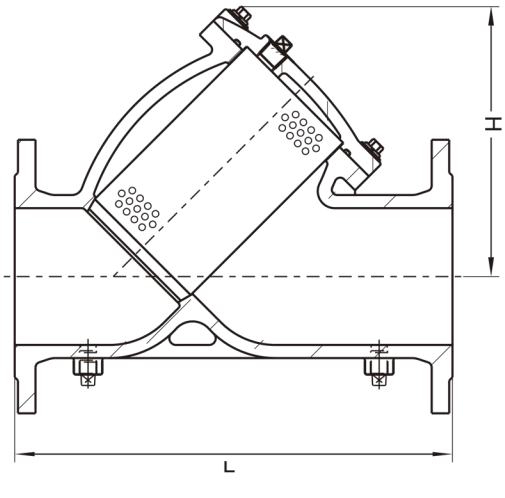

All size is nominal(indicative)
Actual dimesions may vary