GLOBE VALVE
BRONZE
PN25
CODE . LV 401

LAVA
FLOW SOLUTION

SPECIFICATION: ***Bronze Globe Valve,*** **Accordance with BS 1982 EN / 10226/2 PN25 rated. Body, Bonnet and disc to Brass to BS EN 1982, CC491K**

Pressure Rating : ***PN25***
END CONNECTION: ***Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"***
Medium : ***Water,Oil,Seam***

Pressure Rating :

Working Pressure :	*25 bar*
Testing Pressure Shell:	*41 bar*
Suitable Media:	*Water , Oil , Gas*


Temperature Ratings :

Temperature(°C)	*-10 °C*	*to*	*180 °C*



LIST OF MATERIALS

Part	Material	Standard
Body	Bronze	1982 CC491K
Bonnet	Bronze	1982 CC491K
Disc	Bronze	1982 CC491K
Stem	Brass Rod	12165 CW602N
Packing	PTFE	
Gland	Brass Rod	12165 CW602N
Hand Wheel	Aluminum	

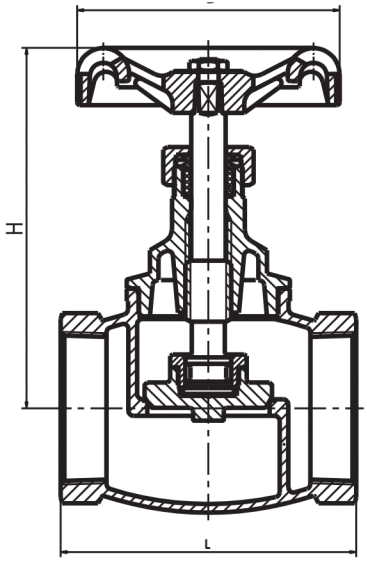

Dimensions

DN		L	H	D
mm	inch			
15	1/2	52	70	60
20	3/4	63	82	65
25	1	76	92	70
32	1-1/4	84	108	78
40	1-1/2	98	120	92
50	2	116	140	103

All size is nominal(indicative)
Actual dimesions may vary