VARIABLE ORIFICE DOUBLE REGULATOR VALVE

BRONZE
PN25
CODE . LV 503

LAVA FLOW SOLUTION

SPECIFICATION: *Bronze, DRV Variable Orifice Double Regulator Valve,* accordance with BS 7350 PN25 rated. Integral Square Edged Entrance Orifice Plate & Insertion Test Points Fitted

Pressure Rating : PN25
END CONNECTION: *Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"*
Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure :	25 bar
Suitable Media:	Water , Oil , Steam

Temperature Ratings :

Temperature (C) :	-10	to	100 °C




LIST OF MATERIALS

Part	Material	Standard
Body	Bronze	BS EN 1982 CC 491 K
Bonnet	DZR Brass	12165 CW 617N
Disc (15-20)	DZR Brass	12165 CW 617N
Disc (25-50)	Bronze	BS EN 1982 CC 491 K
Stem	DZR Brass	12165 CW 617N
Test Points	DZR Brass	12165 CW 617N
Hand Wheel	Plastic	

Dimensions

Nom Size		Dimensions(mm)	Kvs
mm	inch	L	
15	1/2	88	2.88
20	3/4	100	5.64
25	1	113	8.35
32	1-1/4	117	12.45
40	1-1/2	131	18.79
50	2	150	27.29

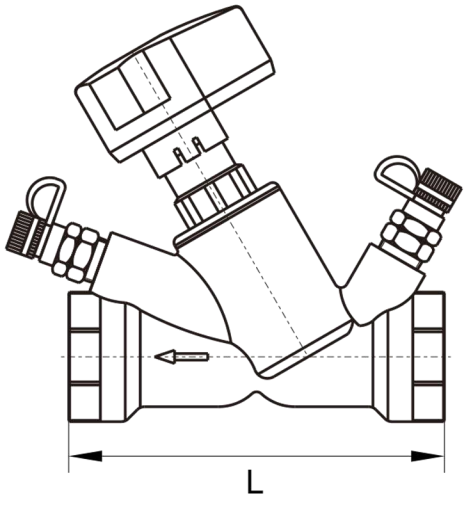

All size is nominal(indicative)
Actual dimesions may vary