GLOBE SILENT CHECK VALVE

DUCTILE IRON

PN16

CODE . LV 807

LAVA FLOW SOLUTIONS

SPECIFICATION: *Ductile Iron, Globe Type Silent Check Valve, Stainless Steel Spring ,EPDM Seat Accordance with BS 558 Flanged to BS EN 1092-2, PN16 rated.*

Pressure Rating : ***PN16***

END CONNECTION: *Flanged accordance to BS 4504 - BS EN 1092 - 2*

Medium : *Water,Oil,Steam*

Pressure Rating :

Working Pressure:	16 bar
Testing Pressure Shell:	24 bar
Testing Pressure Seat :	17 bar


Temperature Ratings :

Temperature (C) :	-10 ˚C	to	120 ˚C

LIST OF MATERIALS

Part	Material
Body	Ductile Iron
Disc	Stainless Steel
Seat	Stainless Steel
Seat Ring	EPDM
Spring	Stainless Steel



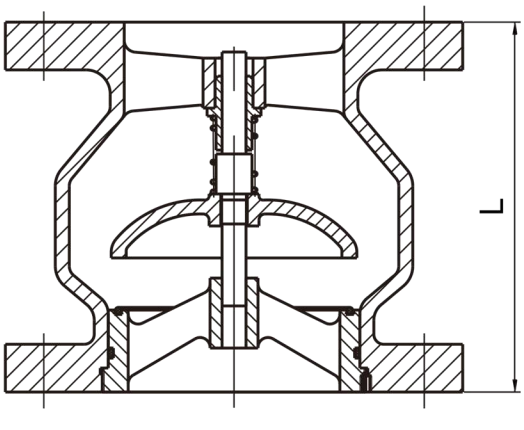

Dimensions

DN													
	mm	65	80	100	125	150	200	250	300	350	400	450	500	600
	inch	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24
L		140	152	185	216	229	257	393	362	400	448	476	524	610

All size is nominal(indicative)
Actual dimesions may vary