BASKET STRAINER

CAST IRON

PN16

CODE . LV 1005

LAVA FLOW SOLUTIONS

SPECIFICATION: Cast Iron Basket Strainer,Bolted Cap, Stainless Steel Wire Mesh 304
Accordance with PN16 rated. BS EN 10226-2,Suitable for mounting in horizontal and vertical

Pressure Rating : PN16

END CONNECTION: *Flanged Accordance to BS 4594 - BS EN 1092-2*

Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	16 bar
Testing Pressure Shell:	24 bar
Suitable Media:	Water, Oil , Steam

Temperature Ratings :

Temperature (C) :	-10 ˚C	to	120 ˚C


LIST OF MATERIALS

Part	Material
Body	Cast Iron
Bonnet	Cast Iron
Plug	Cast Iron
Screen	Stainless steel



Dimensions

DN mm	SIZE inch	L	H1	H2
65	2- 1/2	210	155	95
80	3	251	190	105
100	4	292	205	117
125	5	334	219	146
150	6	378	235	165
200	8	472	295	215
250	10	511	335	325
300	12	680	405	355
350	14	769	585	345
400	16	842	590	390
450	18	842	590	420
500	20	842	600	510
600	24	1045	1175	515

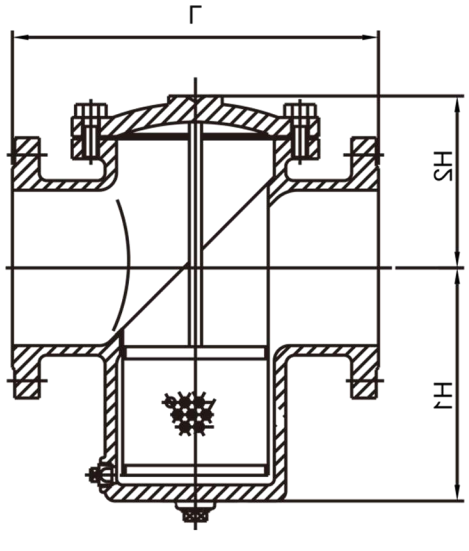

Actual dimesions may vary