BALL VALVE
BRASS
PN20
CODE . LV 303

LAVA
FLOW SOLUTION

SPECIFICATION: ***Bronze Ball Valve,*** **accordance with BS 1982 EN / 10226/2**
PN20 rated. Body, Bonnet and disc to Brass to BS EN 1982, CC491K


Pressure Rating : PN25
END CONNECTION: ***Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"***
Medium : water,oil,steel

Pressure Rating :

Working Pressure:	***25 bar***
Testing Pressure Shell :	***41 bar***
Testing Pressure Shell:	***Water , Oil , Steam***


Temperature Ratings :

Temperature :	***-10˚C***	***to***	***180˚C***

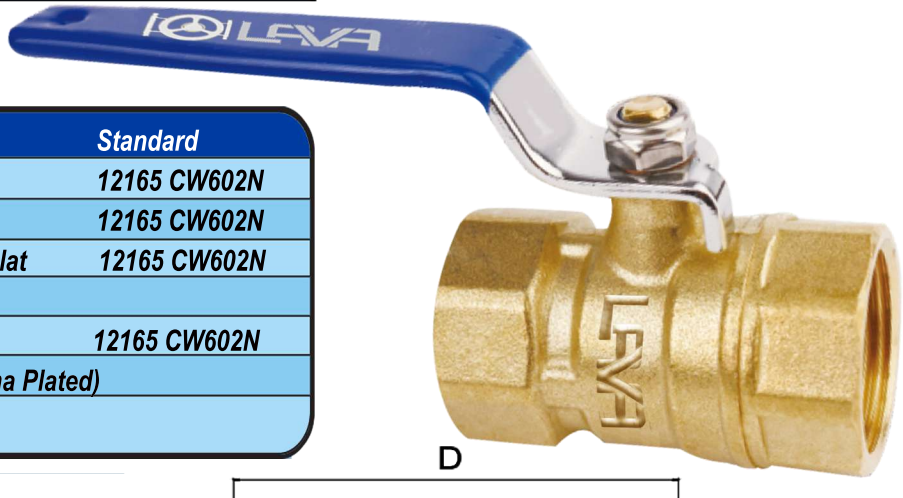

LIST OF MATERIALS

Part	Material	Standard
Body	Brass	12165 CW602N
Cap	Brass	12165 CW602N
Ball	Brass + Chroma Plat	12165 CW602N
Seat	PTFE	
Stem	DZR Brass	12165 CW602N
Handle	Mild Steel (Chroma Plated)	
Handle Caver	PVC	

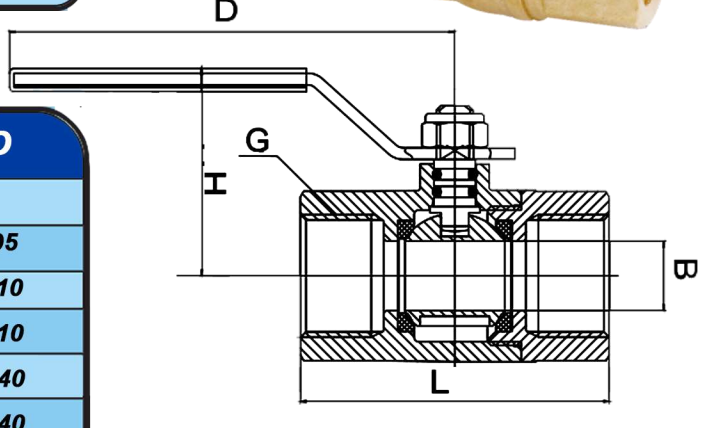

Dimensions

DN		L	H	D
mm	inch			
15	1/2	53	44	95
20	3/4	61	51	110
25	1	71	55	110
32	1-1/4	85	65	140
40	1-1/2	92	70	140
50	2	114	83	160
65	2-1/2	134	118	220
80	3	152	132	270
100	4	182	150	280

All size is nominal(indicative)
Actual dimesions may vary