FIXED ORIFICE
DOUBLE REGULATOR VALVE
BRONZE
PN25
CODE . LV 501

LAVA
FLOW SOLUTION

SPECIFICATION: ***Bronze, DRV Fixed Orifice Double Regulator Valve,*** **accordance with BS 7350**
PN25 rated. Integral Square Edged Entrance Orifice Plate & Insertion Test Points Fitted


Pressure Rating : ***PN25***
END CONNECTION: ***Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"***
Medium : ***Water,Oil,Steam***

Pressure Rating :

Working Pressure :	*25 bar*
Suitable Media:	*Water , Oil , Steam*

Temperature Ratings :

Temperature (C) :	*-10*	*to*	*100˚C*

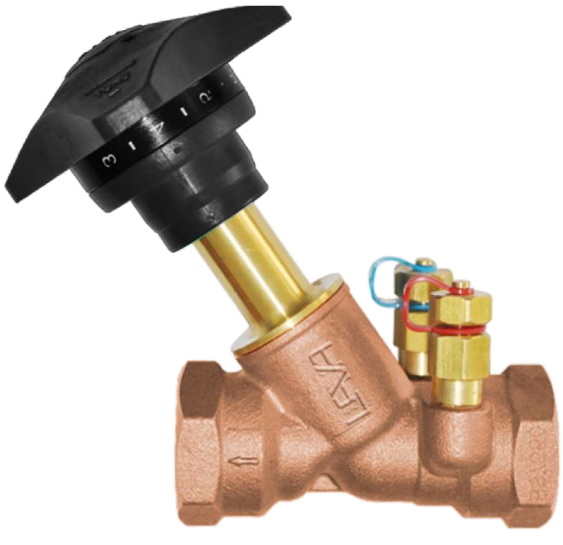


LIST OF MATERIALS

Part	*Material*	*Standard*
Body	*Bronze*	*BS EN 1982 CC 491 K*
Bonnet	*DZR Brass*	*12165 CW 617N*
Disc (15-20)	*DZR Brass*	*12165 CW 617N*
Disc (25-50)	*Bronze*	*BS EN 1982 CC 491 K*
Stem	*DZR Brass*	*12165 CW 617N*
Test Points	*DZR Brass*	*12165 CW 617N*
Hand Wheel	*Plastic*	

Dimensions

Size		Dimensions(mm)		Kvs
Inch	mm	L	H	
½	DN15	87	113	2.20
¾	DN20	96	114	4.60
1	DN25	100	135	8.50
1¼	DN32	114	136	16.70
1½	DN40	125	151	26.10
2	DN50	146	152	43.20

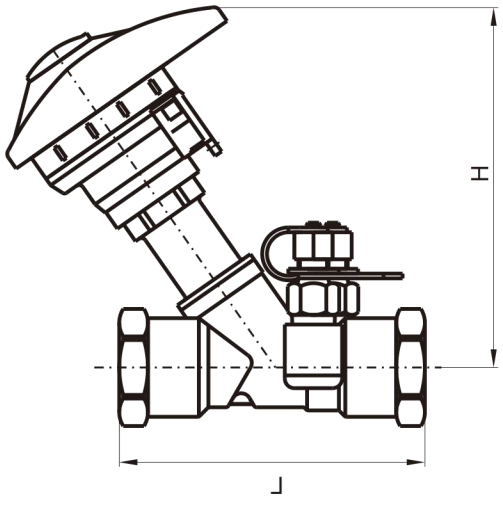

All size is nominal(indicative)
Actual dimesions may vary