FIXED ORIFICE
DOUBLE REGULATOR VALVE
BRASS
PN25
CODE . LV 502

LAVA
FLOW SOLUTION

SPECIFICATION: ***Brass, DRV Fixed Orifice Double Regulator Valve,*** **accordance with BS 7350**
PN25 rated. Integral Square Edged Entrance Orifice Plate & Insertion Test Points Fitted

Pressure Rating : ***PN25***
END CONNECTION: ***Taper threaded According BS EN 10226-2 (ISO 7-1)/BS 21"***
Medium : ***Water,Oil,Steam***

Pressure Rating :

Working Pressure :	*25 bar*
Suitable Media:	*Water , Oil , Steam*

Temperature Ratings :

Temperature (C) :	*-10*	*to*	*100 °C*




LIST OF MATERIALS

Part	*Material*	*Standard*
Body	*Brass*	*12165 CW602N*
Bonnet	*Brass*	*12165 CW 617N*
Disc (15-20)	*DZR Brass*	*12165 CW 617N*
Disc (25-50)	*Brass*	*12165 CW602N*
Stem	*DZR Brass*	*12165 CW 617N*
Test Points	*DZR Brass*	*12165 CW 617N*
Hand Wheel	*Plastic*	

Dimensions

Nom Size		*Dimensions(mm)*		*Kvs*
mm	*inch*	*L*	*H*	
15	*1/2*	*87*	*113*	*2.20*
20	*3/4*	*96*	*114*	*4.60*
25	*1*	*100*	*135*	*8.50*
32	*1-1/4*	*114*	*136*	*16.70*
40	*1-1/2*	*125*	*151*	*26.10*
50	*2*	*146*	*152*	*43.20*

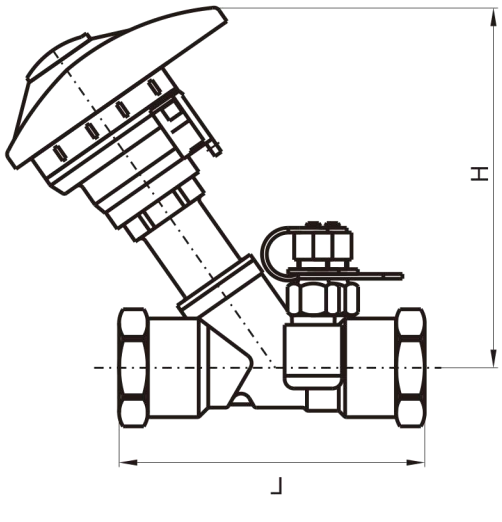

All size is nominal(indicative)
Actual dimesions may vary