Y STRAINER
BRASS
PN20
CODE . LV 903

LAVA
FLOW SOLUTIONS

SPECIFICATION : **Brass Y Strainer , Screwed Cap, Stainless Steel Wire Mesh 304**
Accordance with PN20 rated. BS EN 10226-2,suitable for mounting in horizontal and vertical

Pressure Rating : PN20
UK END CONNECTION: Taper Threaded According BS EN 10226-2 (ISO 7-1)/BS 21"
Medium : Water,Oil,Steam

Pressure Rating :

Working Pressure:	*20 bar*
Testing Pressure Shell:	*31 bar*
Suitable Media:	*Water, Oil , Steam*



Temperature Ratings :


Temperature (C) :	*-10 ˚C to 180 ˚C*

LIST OF MATERIALS

Part Name	*Material*	*Standard*
Body	*Brass*	*12165 CW 617N*
Cap	*Brass*	*12165 CW 617N*
Plug	*Brass*	*12165 CW 617N*
Screen	*Stainless Steel*	
Gasket	*Non - Asbestos*	

Dimensions

DN mm	SIZE inch	L	H
15	1/2	58	33
20	3/4	70	41
25	1	88	49
32	1 1/4	96	56
40	1 1/2	107	62
50	2	126	80

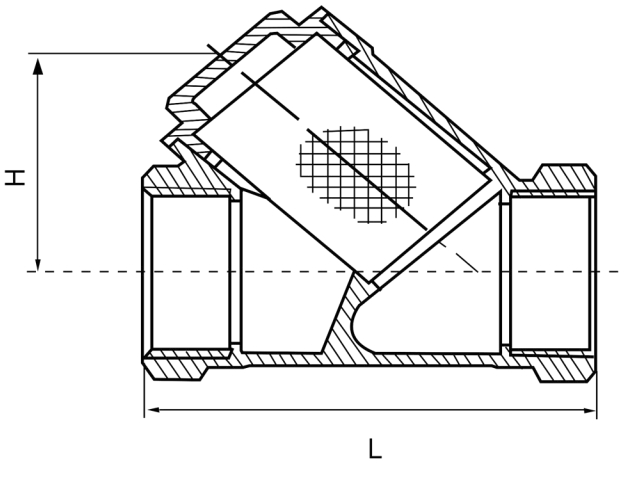

All size is nominal(indicative)
Actual dimesions may vary